

Referenzen

# Darius and Girenas Stadium



## Beteiligung von Uponor

- ✓ Snow and ice melting system Uponor Meltaway | Uponor Meltaway PE-Xa pipe (25 x 2.3) – whole area – 31 860 m (54 x 590 m) | Uponor Meltaway d160 collectors (36 pcs x 12 (6m) cc 500 (in all – 216 contours)).

## Darius and Girėnas Stadium

First stadium in Lithuania to meet UEFA category 4 standards!

Darius and Girėnas Stadium is the first sports arena, to meet UEFA Category 4 standards in Lithuania. The renovation process lasting almost four years is scheduled to be finished in 2022. Recent upgrades will allow sports fans to enjoy competitions and sports events even during the cold and rainy seasons. The area which is equipped with a hybrid coating adapted for use in various weather conditions reaches up to 7,140 m<sup>2</sup>. More than 33 kilometers of Uponor Pex-a pipes were used to install the system.

During the reconstruction of the stadium, not only the infrastructure for sports activities was renewed, but new, comfortable lodges with a capacity of more than 15 thousand spectators were added as well.

## Fakten zum Projekt

Location

Kaunas, Lithuania

Fertigstellung

2022

Gebäudetyp

Sportanlagen

Adresse

Perkūno al. 5, Žaliakalnis, Kaunas

Art des Projekts

Renovation

## Partner

Technical project promoter [UAB](#)

"Bendrieji Statybų Projektai"

---

### Description:

Certificates: UEFA category 4 certificate.

Location: Ažuolynas park, Žaliakalnis, Perkūno alley, Kaunas city, Lithuania.

Uponor solutions: Snow and ice melting system Uponor Meltaway.

### History:

Darius and Girėnas state stadium was first opened in 1925 and underwent its first major renovation in 1998 when it was upgraded to UEFA regulations of the time. Later on, in 2005 it underwent a major modernization – the biggest television screen in all of the Baltic countries was installed. The latest renovation started in 2018 and is scheduled to be completed in 2022.

### Benefits of lawn heating:

- Heated field can be used all year-round – season starts earlier and ends later than on regular stadiums.
- Protection against ground frostbite – reducing the number of injuries sustained during matches – accident prevention.
- Fallen snow is melted almost immediately and moisture does not remain on the lawn.
- Positive effect on the lawn (when operated correctly).


### Project information:

- Field length – 105 m
- Width – 68 m
- Whole area – 7500 m<sup>2</sup>
- Heated area – 7140 m<sup>2</sup>

### Main data of the system installed:

- 25 cm pitch in the pipe contours
- Contours are combined using the Tichelmann principle
- HDPE d200 mm pipes up to Meltaway manifolds
- Heat carrier with glycol – 40%. Its parameters – 40/30

## Darius ir Girėno Stadionas

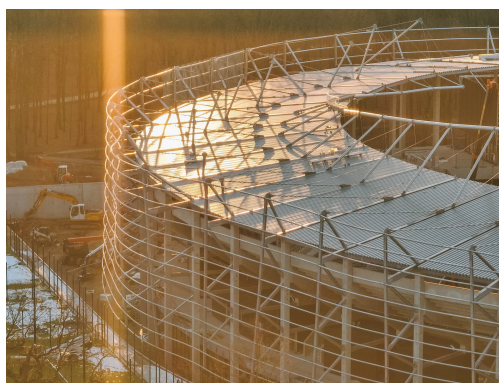





**uponor**

Adresse

**Hauptsitz:**

Uponor Kamo GmbH  
Heineckes Feld 9  
29227 Celle

**Niederlassung Ba.-Wü.:**

Uponor Kamo GmbH  
Max-Planck-Straße 11  
89584 Ehingen/Donau

W [www.uponor-kamo.de](http://www.uponor-kamo.de)